

IN 173


Sophisticated design makes for easy beam angle adjustments, Excellent glare control via louver, The compact structure provides easy installation and maintenance.



SPECIFICATION




MODEL	UNDER WAVE IN 173
OPERATING VOLTAGE	24V DC
POWER CONSUMPTION	9W
LED TYPE	High Power LED
COLOUR TEMP OPTION	2700K, 3000K, 4000K, 5000K
CRI	80min
PRODUCT EFFICIENCY	81lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	15°, 20°, 30°, 45°
MATERIAL	Aluminum + Stainless Steel 316L + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	Ø173*150 (H)mm
CABLE LENGTH	300mm
CONTROL SYSTEM	ON/OFF, 0-10V Dim
IP RATING	IP67
IK RATING	IK10

FEATURES & OPTIONS

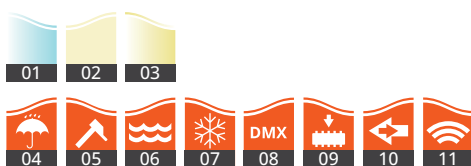


- | | |
|-----------------|-------------------|
| 01. CW | 07. POLAR |
| 02. NW | 08. DMX |
| 03. WW | 09. RFU |
| 04. IP67 | 10. RDM |
| 05. IK10 | 11. WIRELESS DATA |
| 06. ANTI-SALINE | |

DIMENSIONS

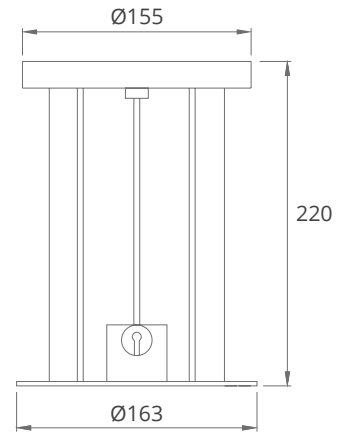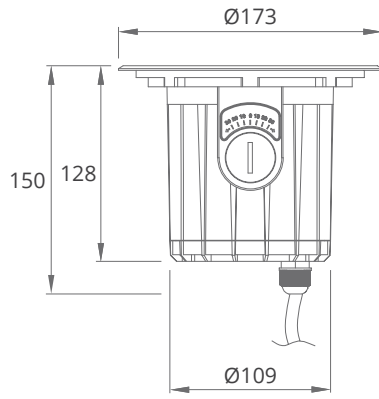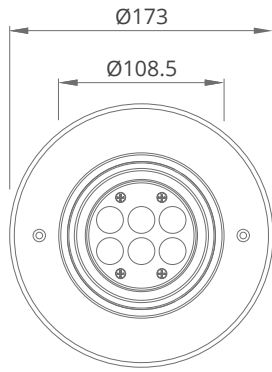

Pre installation Kit

Honey Comb (HC)



*all units are in mm

OPTIC SELECTION



20°

LED	Lumens	Watts	Efficacy
WHITE	756.86	9.30	81.38

CenterBeamLux	Illuminance at Distance
4771.44 lx	0.5 m
1192.86 lx	1.7 m
530.16 lx	2.5 m
298.21 lx	3.3 m
190.86 lx	4.2 m
132.54 lx	5.0 m

■ Ver. Spread: 22.3° ■ Horiz. Spread: 23.1°



30°

LED	Lumens	Watts	Efficacy
WHITE	634.50	9.00	70.50

CenterBeamLux	Illuminance at Distance
2450.07 lx	0.5 m
612.52 lx	1.7 m
272.23 lx	2.5 m
153.13 lx	3.3 m
98.00 lx	4.2 m
68.06 lx	5.0 m

■ Ver. Spread: 31.2° ■ Horiz. Spread: 31.4°

3000K